


# RSSLine Integrations



# API Guide

Last update: JANUARY 2025

## Retail

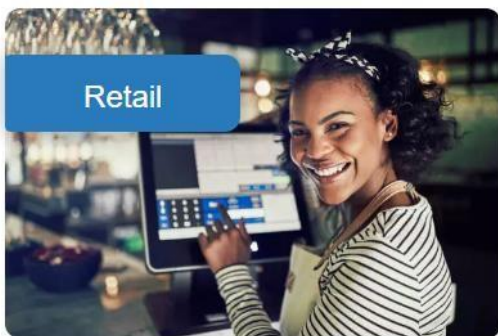

-  Grocery Stores
-  Supermarkets
-  Petrol Station Shops
-  Non Food
-  Clothing, Shoe
-  All Retail Stores

## F & B



-  Restaurant
-  Cafe & Patisserie
-  Fast Food
-  Pizzeria
-  Bar & Pub
-  Bakery

## Services



-  Tyre - Car Service
-  Carwash
-  Salons
-  Hairdresser
-  Hotels
-  Catering





# HTTP-Rest API Integrations

## Document HTTP Rest v.1.0

Integration Credentials provide access to your RSSLine account via the API.  
Integration Credentials are generated when you open the Integration subscription in RSSLine Office

| Integration Credentials                                                                                                                                                 |                          |                 | FFICE | Log Out |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-----------------|-------|---------|
| Integration Credentials give access to your RSSLine account via the API.                                                                                                |                          |                 | +     |         |
|                                                                                                                                                                         | Application Name         | Expiration Date |       |         |
|   | RSSLINE Mobile           | Dec 21, 2025    |       |         |
|   | Logo Entegrasyonu        | Dec 21, 2025    |       |         |
|   | POS+ Open Ticket         | Dec 22, 2025    |       |         |
|   | Yemeksepeti Entegrasyonu | Dec 31, 2025    |       |         |
|   | Trendyol Entegrasyonu    | Dec 31, 2025    |       |         |
|   | E-Ticaret Entegrasyonu   | Dec 31, 2025    |       |         |
|   | Getir Yemek Entegrasyonu | Jan 3, 2025     |       |         |

Integration Credential

< Integration Credentials

Edit

Timecard Integration for Employee Clock in/Clock out tracking

 ZXRoYW5zd29yZDcxQGdtYWlsLmNvbQ==  
Client Id



 YbLHPtqNtZVxpd/qElmLnTZg4ZlpG33xvsQbl+Z/h3l=  
Client Secret



 Nov 21, 2025  
Expiration Date

 Integration Credentials give access to your RSSLine account via the API. Never share it with any third parties.

Contents

1. Token Create ..... 4

2. Token Control ..... 5

3. Item Group List ..... 6

4. Add New Group ..... 7

5. Item List..... 8

6. Add New Item ..... 9

7. Customer List..... 10

8. Add New Customer..... 11

9. Supplier List..... 12

10. Add New Supplier ..... 13

11. Mobile 1.0 Writing Functions ..... 14

12. Sales..... 16

13. Open Order Reading..... 18

14. Open Order Status Update..... 20

1. Token Create

With this method, you can create the token value that you will use to access API points using the client ID and clientSecret values created in the RSSLine Integration menu.

Request URL:

<https://api.rssline.com/api/Integration/GetToken>

Sample Request :

```
POST /api/Integration/oAuth HTTP/1.1
Host: localhost:44360
accept: */*
Content-Type: application/json-patch+json
Content-Length: 118
{
  "clientId": "ZXRoYW5zd29yZDcxQGdtYWlsLmNvbQ=",
  "clientSecret": "ZZ3RgSJkcOwxqMSUyYUd2BbEFqG3eFmxt1brKGdd/g="
}
```

The clientId and clientSecret above are examples. Please use the clientId and clientSecret information in your own integration in RSSLine Office.

Sample Reply:

```
{
  "Token": "*****",
  "Expiration": "2025-01-01T21:00:00Z",
  "Errors": [
    {
      "Code": "",
      "Message": ""
    }
  ],
  "Success": true,
  "Message": "",
  "Data": null
}
```

Input Parameters:

| Parameter    | Parameter Type | Required | Description |
|--------------|----------------|----------|-------------|
| clientId     | String         | r        |             |
| clientSecret | String         | r        |             |

Output Parameters :

| Parameter  | Parameter Type | Required | Description    |
|------------|----------------|----------|----------------|
| Token      | String         | r        |                |
| Expiration | Date           | r        | Validity Date  |
| Errors     | List           |          | erors          |
| Success    | Boolean        |          | request status |
| Message    | String         |          | Error msg      |
| Data       | Object         |          | Not used       |

## 2. Token Control

With this method, you can check whether the validity date you got with the first method has expired or not.

**Request URL :**

<https://api.rssline.com/api/Integration/IsTokenValid>

**Authorization (Bearer) :** Token value created in Step 1

**Scope :** RSSLineIntegration

**Sample Request :**

```
GET /api/Integration/IsTokenValid HTTP/1.1
Host: api.rssline.com
scope: RSSLineIntegration
Authorization: ••••••
```

Returns 200(ok) response for valid token.

### 3. Item Group List

With this method, you can access the product group list defined in RSSLine.

#### Item Group Parameters

| Parameter | Parameter Type | Required | Descriptions     |
|-----------|----------------|----------|------------------|
| Grupid    | Integer        | Required |                  |
| Açıklama  | String         | Required |                  |
| Taborder  | Integer        |          | Row              |
| Aktif     | Boolean        | Required |                  |
| Renkback  | String         |          | Background Color |
| Renkfont  | String         |          | Font color       |
| Sabit     | Integer        |          | No Used          |

#### Reguest URL :

<https://api.rssline.com/api/Integration/GetItemGroupList>

**Authorization (Bearer) :** Token value created in Step 1

**Scope :** RSSLineIntegration

#### Sample Reguest :

```
GET /api/Integration/GetItemGroupList HTTP/1.1
Host: localhost:44360
scope: RSSLineIntegration
Authorization: Bearer *****
```

#### Sample Reply:

```
[
  {
    "Grupid": 1,
    "Aciklama": "Baharatlar",
    "Taborder": null,
    "Aktif": true,
    "Renkback": null,
    "Renkfont": null,
    "Sabit": null
  },
  {
    "Grupid": 2,
    "Aciklama": "Toz Harç Karışımları",
    "Taborder": null,
    "Aktif": true,
    "Renkback": null,
    "Renkfont": null,
    "Sabit": null
  }
]
```

## 4. Add New Group

With this method, you can define a new product group in RS Line.

**Request URL :**

<https://api.rssline.com/api/Integration/CreteItemGroup>

**Authorization (Bearer) :** Token value created in Step 1

**Scope :** RSSLineIntegration

**Sample Request :**

```
POST /api/Integration/CreteItemGroup HTTP/1.1
Host: localhost:44360
scope: RSSLineIntegration
Content-Type: application/json
Authorization: Bearer .....
Content-Length: 203
{
  "Grupid": 0,
  "Aciklama": "Test Group",
  "Taborder": 2,
  "Aktif": true,
  "Renkback": "#575fcf",
  "Renkfont": "#050e21",
  "Sabit": null
}
```

## 5. Item List

With this method, you can access the product list defined in the RSSLine store.

### Item Paremeters

| Parameter            | Parameter Type | Required | Description                           |
|----------------------|----------------|----------|---------------------------------------|
| ItemDescription      | Integer        | Required | Item Descriptions                     |
| ItemGroupDescription | String         | Required | Item Group Descriptions               |
| Barcode              | Integer        | Required | Barcode                               |
| UnitType             | short          | Required | 0 = QTY (psc)<br>1 = KG<br>2 = QTY-KG |
| PurchaseVAT          | double         | Required | purchase VAT                          |
| SaleVAT              | double         | Required | sale VAT                              |
| Price                | decimal        | Required | Sale Price                            |

### Request URL :

<https://api.rssline.com/api/Integration/GetItemList?MagazaNo={0}>

**Authorization (Bearer) :** Token value created in Step 1

**Scope :** RSSLineIntegration

### Sample Reguest :

```
GET /api/Integration/GetItemList?MagazaNo=100 HTTP/1.1
Host: localhost:44360
scope: RSSLineIntegration
Authorization: Bearer ●●●●●●
```

### Sample Reply:

```
[
  {
    "ItemDescription": "PiYALE TAVUK BULYON CATERİNG 5 KG",
    "ItemGroupDescription": "Bulyon Tavuk",
    "Barcode": "0000004504429",
    "UnitType": 0,
    "PurchaseVAT": 10.0,
    "SaleVAT": 10.0,
    "Price": 10.0000000000
  }
]
```

## 6. Add New Item

With this method, you can add products to RSSLine as a list.

**Reguest URL :**

<https://api.rssline.com/api/Integration/CreateItem>

**Authorization (Bearer) :** Token value created in Step 1

**Scope :** RSSLineIntegration

**Sample Reguest :**

```
POST /api/Integration/CreateItem HTTP/1.1
Host: localhost:44360
scope: RSSLineIntegration
Content-Type: application/json
Authorization: Bearer .....
Content-Length: 236

[
  {
    "ItemDescription": "TEST2",
    "ItemGroupDescription": "TEST2",
    "Barcode": "2222222222",
    "UnitType": 1,
    "PurchaseVAT": 0.0,
    "SaleVAT": 0.0,
    "Price": 55.0000000000
  }
]
```

**Sample Reply:**

```
{
  "Errors": [
    {
      "Code": "",
      "Message": ""
    }
  ],
  "Success": true,
  "Message": "",
  "Data": null
}
```

## 7. Customer List

With this method, you can access the customer list defined in the RSSLine store.

### Customer Parameters

| Parameters    | Parameters Type | Required | Descriptions                   |
|---------------|-----------------|----------|--------------------------------|
| Id            | int             | Required | Customer ID.                   |
| CustomerCode  | string          | Required | Customer Code (sm. "CUS.001"). |
| NameSurname   | string          | Required | Customer Name                  |
| Email         | string          | Required | Customer E-Mail                |
| Phone         | string          | Optional | Customer Cell Phone            |
| Address       | string          | Optional | Customer Address               |
| City          | string          | Optional | City                           |
| PostalCode    | string          | Optional | Post Code                      |
| Country       | string          | Optional | Country                        |
| Notes         | string          | Optional | Notes                          |
| PointsBalance | nullable int    | Optional | Point                          |
| EInvoice      | bool            | Optional | E-Invoice (true/false).        |
| EInvoiceType  | nullable int    | Optional | E-Invoice Type                 |
| IdentityNo    | nullable int    | Optional | Customer ID Card No            |
| TaxNo         | nullable int    | Optional | Customer Tax No                |

### Reguest URL :

<https://api.rssline.com/api/Integration/GetCustomerList>

**Authorization (Bearer) :** Token value created in Step 1

**Scope :** RSSLineIntegration

### Sample Reguest :

GET /api/Integration/GetCustomerList HTTP/1.1  
Host: localhost:44360  
scope: RSSLineIntegration  
Authorization: Bearer ●●●●●●

### Sample Reply

```
[
{
  "Id": 1,
  "CustomerCode": "CUS.001",
  "NameSurname": "John Doe",
  "Email": "johndoe@gmail.com",
  "Phone": "05555555555",
  "Address": "Croydon",
  "City": "London",
  "PostalCode": "35000",
  "Country": "UK",
  "Notes": "",
  "PointsBalance": null,
  "EInvoice": false,
  "EInvoiceType": null,
  "IdentityNo": null,
  "TaxNo": null,
  "EInvoiceTypeText": "",
  "ContactName": "John",
  "ContactSurName": "Doe",
  "PaymentDetails": [],
  "TransactionHeaders": []
}
```

## 8. Add New Customer

You can define new customers with this method.

**Reguest URL :**

<https://api.rssline.com/api/Integration/ CreateCustomer>

**Authorization (Bearer) :** Token value created in Step 1

**Scope :** RSSLineIntegration

**Sample Reguest :**

```
POST /api/Integration/CreateCustomer HTTP/1.1
Host: localhost:44360
scope: RSSLineIntegration
Content-Type: application/json
Authorization: Bearer *****
Content-Length: 321

{
  "Id": 0,
  "CustomerCode": "153.0001",
  "NameSurname": "JOHN DOE ",
  "Email": "JOHNDOE@gmail.com",
  "Phone": "05555555555",
  "Address": "Bornova",
  "City": "İzmir",
  "PostalCode": "35000",
  "Country": "Türkiye",
  "Notes": "JOHN DOE "
}
```

**Sample Reply:**

```
{
  "Id": 3,
  "CustomerCode": "153.0001",
  "NameSurname": "JOHN DOE 1",
  "Email": "JOHNDOE@gmail.com",
  "Phone": "05555555555",
  "Address": "Bornova",
  "City": "İzmir",
  "PostalCode": "35000",
  "Country": "Türkiye",
  "Notes": "asd",
  "PointsBalance": null,
  "ElInvoice": false,
  "ElInvoiceType": null,
  "IdentityNo": null,
  "TaxNo": null
}
```

## 9. Supplier List

With this method, you can access the supplier list defined in the RSSLine store.

### Supplier Parameters

| Parameters   | Parameter Type  | Required | Description             |
|--------------|-----------------|----------|-------------------------|
| Id           | int             | Required | Supplier ID             |
| Name         | string          | Required | Supplier Name           |
| Contact      | string          | Required | Supplier Contact Name   |
| Email        | string          | Optional | Supplier E-Mail.        |
| Phone        | string          | Optional | Supplier Cell Phone     |
| Website      | nullable string | Optional | Supplier web            |
| Address      | string          | Optional | Supplier Address        |
| City         | string          | Optional | City                    |
| ZipCode      | string          | Optional | Post code               |
| Country      | string          | Optional | Country                 |
| Note         | nullable string | Optional | Notes                   |
| EInvoice     | bool            | Optional | E-Invoice (true/false). |
| EInvoiceType | nullable int    | Optional | E-Invoice type          |
| IdentityNo   | nullable int    | Optional | Supplier ID No          |
| TaxNo        | nullable int    | Optional | Supplier Tax No         |

### Reguest URL :

<https://api.rssline.com/api/Integration/GetSupplierList>

**Authorization (Bearer) :** Token value created in Step 1

**Scope :** RSSLineIntegration

### Sample Reply :

```
GET /api/Integration/GetSupplierList HTTP/1.1
Host: localhost:44360
scope: RSSLineIntegration
Authorization: Bearer ••••••
```

### Sample Reply

```
[
  {
    "Id": 1,
    "Name": "Supplier1",
    "Contact": "Doğ u Öztürk",
    "Email": "dogu@gmail.com",
    "Phone": "05371280000",
    "Website": null,
    "Address": "Bostanlı Mah. 1783 sk. no:52 Esra apt. Kat.1 Da.5",
    "City": "IZMIR",
    "ZipCode": "35000",
    "Country": "Türkiye",
    "Note": null,
    "EInvoice": false,
    "EInvoiceType": null,
    "IdentityNo": null,
    "TaxNo": null,
    "EInvoiceTypeText": "",
    "PaymentDetails": [],
    "ContactName": "Doğ u",
    "ContactSurName": "Öztürk"
  }
]
```

## 10.Add New Supplier

You can define new suppliers with this method.

**Reguest URL :**

<https://api.rssline.com/api/Integration/ CreateSupplier>

**Authorization (Bearer) :** Token value created in Step 1

**Scope :** RSSLineIntegration

**Sample Reguest:**

```
POST /api/Integration/CreateSupplier HTTP/1.1
Host: localhost:44360
scope: RSSLineIntegration
Content-Type: application/json
Authorization: .....
Content-Length: 411

{
  "Name": "Tedarikçi",
  "Contact": "John Doe",
  "Email": "johndoe@gmail.com",
  "Phone": "02222222222",
  "Website": null,
  "Address": null,
  "City": "İZMİR",
  "ZipCode": "35000",
  "Country": "Türkiye",
  "Note": null,
  "EInvoice": false,
  "EInvoiceType": null,
  "IdentityNo": null,
  "TaxNo": null,
}
```

**Sample Reply:**

```
{
  "Id": 3,
  "Name": "Tedarikçi",
  "Contact": "John Doe",
  "Email": "johndoe@gmail.com",
  "Phone": "02222222222",
  "Website": null,
  "Address": null,
  "City": "İZMİR",
  "ZipCode": "35000",
  "Country": "Türkiye",
  "Note": null,
  "EInvoice": false,
  "EInvoiceType": null,
  "IdentityNo": null,
  "TaxNo": null,
  "EInvoiceTypeText": "",
  "PaymentDetails": [],
  "ContactName": "John",
  "ContactSurName": "Doe"
}
```

# 11. Mobile 1.0 Writing Functions

With this method, you can create product files containing barcode and quantity information to use in RSSLine documents.

**Reguest URL :**

<https://api.rssline.com/api/Integration/CreateMobileFile>

**Authorization (Bearer) :** Token value created in Step 1

**Scope :** RSSLineIntegration

**Sample Reguest :**

```
POST /api/MobileFile/Create HTTP/1.1
Host: localhost:44360
scope: RSSLineIntegration
Content-Type: application/json
Authorization: ●●●●●●
Content-Length: 381

{
  "Id": 0,
  "Date": "2024-12-03T11:48:41",
  "FileName": "MaAlim",
  "MagazaNo": 100,
  "Type": 1,
  "statu": 0,
  "MobileFileDetails": [
    {
      "Id": 0,
      "MobileFileId": 0,
      "Quantity": 1,
      "Barcode": "0000000294652"
    },
    {
      "Id": 0,
      "MobileFileId": 0,
      "Quantity": 2,
      "Barcode": "0000001151138"
    }
  ]
}
```

**Sample Reply:**

```
{
  "Id": 2,
  "Date": "2024-12-03T11:48:41",
  "FileName": "MaAlim",
  "MagazaNo": 100,
  "Type": 1,
  "Statu": 0,
  "MobileFileDetails": [
    {
      "Id": 2,
      "MobileFileId": 2,
      "Quantity": 1.0,
      "Barcode": "0000000294652"
    },
    {
      "Id": 3,
      "MobileFileId": 2,
      "Quantity": 2.0,
      "Barcode": "0000001151138"
    }
  ]
}
```

Input Parameters

MobileFile :

| Parameter         | Parameter Type | Required | Descriptions                                                          |
|-------------------|----------------|----------|-----------------------------------------------------------------------|
| Id                | Integer        | Required | file Id<br>0 is sent when making a request                            |
| Date              | Date           | Required | Format : 2024-12-03T11:48:41                                          |
| FileName          | String         | Required | File name                                                             |
| MagazaNo          | Integer        | Required | Store no                                                              |
| Type              | Integer        | Required | 1 = Stock input<br>2 = Stock output<br>3 = Stock slip<br>4 = Labeling |
| Statu             | Integer        | Required | File usage status<br>0 is sent when making a request                  |
| MobileFileDetails | List<Object>   | Required | Item qty and barcode                                                  |

MobileFileDetail:

| Parameter    | Parameter Type | Required | Descriptions                                   |
|--------------|----------------|----------|------------------------------------------------|
| Id           | Integer        | Required | File Row Id<br>0 is sent when making a request |
| MobileFileId | Integer        | Required | File Id<br>0 is sent when making a request     |
| Quantity     | Decimal        | Required | Item qty                                       |
| Barcode      | String         | Required | Barcode                                        |

Output Parameters :

The sent object is included in the response along with its Id values.

## 12. Sales

This method provides access to RSSLine sales data based on specific criteria.

**Criteria**

| Parameter     | Parameter Type | Required | Descriptions     | Format              |
|---------------|----------------|----------|------------------|---------------------|
| MagazaNo      | Integer        | optional | Store No         |                     |
| StartDateTime | Date           | optional | Sale Date Start  | yyyy-mm-DDTHH:MM:ss |
| EndDateTime   | Date           | optional | Sale Date finish | yyyy-mm-DDTHH:MM:ss |

**Reguest URL :**

<https://api.rssline.com/api/Integration/GetSales>

**Authorization (Bearer) :** Token value created in Step 1

**Scope :** RSSLineIntegration

**Sample Reguest :**

```
POST /api/Integration/GetSales HTTP/1.1
Host: localhost:44360
scope: RSSLineIntegration
Content-Type: application/json
Authorization: .....
Content-Length: 107
{
  "MagazaNo": 100,
  "StartDateTime": "2024-12-13T12:33:37",
  "EndDateTime": "2024-12-13T13:00:00"
}
```

Sale Parameter

| Parameter            | Parameter Type  | Descriptions                                   |                       |                                                                   |
|----------------------|-----------------|------------------------------------------------|-----------------------|-------------------------------------------------------------------|
| TransactionHeaderId  | int             | The unique ID of the transaction header.       |                       |                                                                   |
| MagazaNo             | int             | Store No                                       |                       |                                                                   |
| PosCode              | int             | POS Code                                       |                       |                                                                   |
| TransactionDate      | datetime        | Transaction Date                               |                       |                                                                   |
| ReceiptNo            | int             | Receipt No                                     |                       |                                                                   |
| CompanyUserCode      | string          | User Code                                      |                       |                                                                   |
| DocumentType         | int             | Doc Type (0: Receipt, 1: Invoice, 2 : Return). |                       |                                                                   |
| TransactionType      | int             | Transaction Type (0: Normal , 1: Cancel).      |                       |                                                                   |
| UserDocNumber        | nullable string | Document number entered by the user.           |                       |                                                                   |
| SaleStartTime        | datetime        | The start time of the sale.                    |                       |                                                                   |
| SaleEndTime          | datetime        | Sale end time.                                 |                       |                                                                   |
| GrossTotal           | decimal         | Gross Total                                    |                       |                                                                   |
| GrossTotalVat        | decimal         | Gross Total Vat                                |                       |                                                                   |
| GrossTotalDiscount   | decimal         | Gross Total Discount                           |                       |                                                                   |
| ReceiptDiscountTotal | decimal         | Discount to Receipt Total                      |                       |                                                                   |
| LineDiscountTotal    | decimal         | Line Discount                                  |                       |                                                                   |
| CshrDiscountTotal    | decimal         | Cashier discount total                         |                       |                                                                   |
| AutoDiscountTotal    | decimal         | Automatic discount total.                      |                       |                                                                   |
| CustDiscountTotal    | decimal         | Total customer discount.                       |                       |                                                                   |
| PromDiscountTotal    | decimal         | Promotional discount total.                    |                       |                                                                   |
| CustomerCode         | string          | Customer Code                                  |                       |                                                                   |
| Transaction Lines    | Array           | <b>Parameter</b>                               | <b>Parameter Type</b> | <b>Descriptions</b>                                               |
|                      |                 | TransactionLineId                              | int                   | The unique ID of the transaction row.                             |
|                      |                 | TransactionHeaderId                            | int                   | The transaction header ID.                                        |
|                      |                 | Barcode                                        | string                | Item barcode                                                      |
|                      |                 | TaxPercent                                     | float                 | Percent Vat                                                       |
|                      |                 | LineNumber                                     | int                   | Row No                                                            |
|                      |                 | TransactionType                                | int                   | Transaction Type (0: Sale, 1:Cancel).                             |
|                      |                 | Amount                                         | decimal               | Item Amount                                                       |
|                      |                 | Unit                                           | int                   | Unit type (e.g. piece, kilo).                                     |
|                      |                 | UnitPrice                                      | decimal               | Unit Price                                                        |
|                      |                 | LineTotalValue                                 | decimal               | Line Total                                                        |
|                      |                 | LineTotalVat                                   | decimal               | Vat Line Total                                                    |
|                      |                 | LineTotlDiscount                               | decimal               | Line Total Discount                                               |
|                      |                 | LineDiscount                                   | decimal               | Line Discount                                                     |
|                      |                 | LineReceiptDiscount                            | decimal               | The bottom discount applied in sales is distributed to the lines. |
|                      |                 | LineCshrDiscount                               | decimal               | Cashier discount total.                                           |
|                      |                 | LineAutoDiscount                               | decimal               | Automatic Discount total                                          |
|                      |                 | LineCustDiscount                               | decimal               | Total customer discount.                                          |
|                      |                 | LinePromDiscount                               | decimal               | Promotional discount total.                                       |
|                      |                 | TransactionModifiers                           | Array                 |                                                                   |
| TransactionPayments  | Array           | <b>Parameter</b>                               | <b>Parameter Type</b> | <b>Descriptions</b>                                               |
|                      |                 | TransactionPaymentId                           | int                   | The unique ID of the payment transaction.                         |
|                      |                 | TransactionHeaderId                            | int                   | The transaction header ID.                                        |
|                      |                 | LineNumber                                     | int                   | Row No                                                            |
|                      |                 | PaymentRefCode                                 | int                   | Payment reference code.                                           |
|                      |                 | PaymentType                                    | int                   | Payment type (0: Cash, 1: Change).                                |
|                      |                 | Canceled                                       | int                   | Payment cancellation status (0: Not canceled).                    |
|                      |                 | PaymentTotal                                   | decimal               | The total amount of the payment.                                  |
| TransactionDiscounts | Array           | <b>Parameter</b>                               | <b>Parameter Type</b> | <b>Descriptions</b>                                               |
|                      |                 | TransactionDiscountId                          | int                   | The unique ID of the discount transaction.                        |
|                      |                 | TransactionHeaderId                            | int                   | The transaction header ID.                                        |
|                      |                 | DiscountCode                                   | string                | Discount code.                                                    |
|                      |                 | LineNumber                                     | int                   | Row No                                                            |
|                      |                 | Amount                                         | decimal               | Discount Amount                                                   |

### 13. Open Order Reading

This method provides access to RSSLine open order data based on certain criteria.

**Criteria**

| Parameter   | Parameter Type | Required | Descriptions                      |
|-------------|----------------|----------|-----------------------------------|
| MagazaNo    | Integer        | optional | Store No                          |
| OrderType   | Integer        | optional | 1= TableService 2= OnlineChannels |
| OrderStatus | Integer        | optional | 1= Pending 2= Closed              |
| TableNo     | Integer        | optional | Table No                          |
| WaiterNo    | Integer        | optional | Waiter No                         |

**Request URL :**

<https://api.rssline.com/api/Integration/GetOpenOrders>

**Authorization (Bearer) :** Token value created in Step 1

**Scope :** RSSLineIntegration

**Sample Request :**

```
POST /api/Integration/GetOpenOrders HTTP/1.1
Host: localhost:44360
scope: RSSLineIntegration
Content-Type: application/json
Authorization●●●●●●
Content-Length: 98
{
  "MagazaNo": 100,
  "OrderType": 1,
  "OrderStatus": 1,
  "TableNo": 2,
  "WaiterNo": 1
}
```

Open Order Parameter:

| Parameter             | Parameter Type  | Descriptions                                       |                       |                                                                      |
|-----------------------|-----------------|----------------------------------------------------|-----------------------|----------------------------------------------------------------------|
| Id                    | int             | Order header unique ID.                            |                       |                                                                      |
| MagazaNo              | int             | Store No                                           |                       |                                                                      |
| TransactionDate       | datetime        | Start Date                                         |                       |                                                                      |
| CompanyUserCode       | string          | User Code                                          |                       |                                                                      |
| OrderType             | int             | 1= TableService 2= OnlineChannels                  |                       |                                                                      |
| OrderStatus           | int             | 1= Pending 2= Closed                               |                       |                                                                      |
| TableNo               | int             | Table No                                           |                       |                                                                      |
| TableName             | string          | Table Name                                         |                       |                                                                      |
| WaiterNo              | int             | Waiter No                                          |                       |                                                                      |
| WaiterName            | string          | Waiter Name                                        |                       |                                                                      |
| OnlineChannelNo       | nullable int    | Online Channel No                                  |                       |                                                                      |
| OnlineChannelName     | nullable string | Online Channel Name                                |                       |                                                                      |
| DeliveryType          | int             | 1 = Delivery 2 = Pickup                            |                       |                                                                      |
| DeliveryOrderStatus   | int             | 1 = Received 2 = Reading 3 = Shipped 4 = Delivered |                       |                                                                      |
| DeliveryCustomerPhone | nullable string | Teslimat müşteri telefon numarası.                 |                       |                                                                      |
| DeliveryCustomerEmail | nullable string | Delivery customer email address.                   |                       |                                                                      |
| DeliveryCustomerName  | nullable string | Delivery customer name.                            |                       |                                                                      |
| DeliveryAddress       | nullable string | Shipping address.                                  |                       |                                                                      |
| KitchenPrinterStatus  | int             | Kitchen printer status.                            |                       |                                                                      |
| UserDocNumber         | nullable string | User document number.                              |                       |                                                                      |
| SaleStartTime         | datetime        | The start time of the sale.                        |                       |                                                                      |
| SaleEndTime           | datetime        | Sale end time.                                     |                       |                                                                      |
| GrossTotal            | decimal         | Gross total amount.                                |                       |                                                                      |
| GrossTotalVat         | decimal         | Total gross VAT amount.                            |                       |                                                                      |
| GrossTotalDiscount    | decimal         | Gross total discount.                              |                       |                                                                      |
| ReceiptDiscountTotal  | decimal         | The total amount of receipt discounts.             |                       |                                                                      |
| LineDiscountTotal     | decimal         | The total amount of line-based discounts.          |                       |                                                                      |
| CshrDiscountTotal     | decimal         | Total amount of cashier-based discounts.           |                       |                                                                      |
| AutoDiscountTotal     | decimal         | The total of automatically applied discounts.      |                       |                                                                      |
| CustDiscountTotal     | decimal         | Total of customer-based discounts.                 |                       |                                                                      |
| PromDiscountTotal     | decimal         | Total of promotion-based discounts.                |                       |                                                                      |
| CustomerCode          | nullable string | Customer code (e.g. loyalty card).                 |                       |                                                                      |
| OpenOrderLines        |                 | <b>Parameter</b>                                   | <b>Parameter Type</b> | <b>Descriptions</b>                                                  |
|                       |                 | Id                                                 | int                   | The unique ID of the order line.                                     |
|                       |                 | OpenOrderHeaderId                                  | int                   | The relevant order header ID.                                        |
|                       |                 | Barcode                                            | string                | Item Barcode                                                         |
|                       |                 | TaxPercent                                         | float                 | VAT percentage.                                                      |
|                       |                 | LineNumber                                         | int                   | Line number.                                                         |
|                       |                 | TransactionType                                    | int                   | Type (0: Sale, 1:Cancel).                                            |
|                       |                 | Amount                                             | decimal               | Item Amount                                                          |
|                       |                 | Unit                                               | int                   | Unit type (e.g. piece, kilo).                                        |
|                       |                 | UnitPrice                                          | decimal               | Unit price.                                                          |
|                       |                 | LineTotalValue                                     | decimal               | The total amount of the row.                                         |
|                       |                 | LineTotalVat                                       | decimal               | Line total VAT.                                                      |
|                       |                 | LineTotlDiscount                                   | decimal               | Total Discount                                                       |
|                       |                 | LineDiscount                                       | decimal               | Line Discount                                                        |
|                       |                 | LineReceiptDiscount                                | decimal               | The bottom discount applied in sales is distributed among the lines. |
|                       |                 | LineCshrDiscount                                   | decimal               | Cashier discount total.                                              |
|                       |                 | LineAutoDiscount                                   | decimal               | Automatic discount total.                                            |
|                       |                 | LineCustDiscount                                   | decimal               | Total customer discount.                                             |
|                       |                 | LinePromDiscount                                   | decimal               | Promotional discount total.                                          |
|                       |                 | TransactionModifiers                               | Array                 |                                                                      |
| OpenOrderPayments     |                 | <b>Parameter</b>                                   | <b>Parameter Type</b> | <b>Descriptions</b>                                                  |
|                       |                 | Id                                                 | int                   | The unique ID of the order line.                                     |
|                       |                 | OpenOrderHeaderId                                  | int                   | The relevant order header ID.                                        |
|                       |                 | LineNumber                                         | int                   | Line No                                                              |
|                       |                 | PaymentCode                                        | int                   | Payment reference code.                                              |
|                       |                 | PaymentType                                        | int                   | Payment type (0: Cash, 1: Change).                                   |
|                       |                 | Canceled                                           | int                   | Payment cancellation status (0: Not canceled).                       |
|                       |                 | PaymentTotal                                       | decimal               | The total amount of the payment.                                     |
| OpenOrderDiscounts    |                 | <b>Parameter</b>                                   | <b>Parameter Type</b> | <b>Descriptions</b>                                                  |
|                       |                 | Id                                                 | int                   | The unique ID of the order line.                                     |
|                       |                 | OpenOrderHeaderId                                  | int                   | The relevant order header ID.                                        |
|                       |                 | DiscountCode                                       | string                | Discount Code                                                        |
|                       |                 | LineNumber                                         | int                   | Line No                                                              |
|                       |                 | Amount                                             | decimal               | Discount Amount                                                      |

# 14. Open Order Status Update

This method is used to update the status of the order with the Order Header Id value.

## Criteria

| Parameter   | Parameter Type | Required | Descriptions         |
|-------------|----------------|----------|----------------------|
| OpenOrderID | Integer        | Optional | Order Id             |
| OrderStatus | Integer        | Optional | 1= Pending 2= Closed |

## Request URL :

<https://api.rssline.com/api/Integration/UpdateOpenOrderStatus>

**Authorization (Bearer) :** Token value created in Step 1

**Scope :** RSSLineIntegration

## Sample Request :

```
PUT /api/Integration/UpdateOpenOrderStatus HTTP/1.1
Host: localhost:44360
scope: RSSLineIntegration
Content-Type: application/json
Authorization*****
Content-Length: 48
{
  "OpenOrderID": 2580,
  "OrderStatus": 1
}
```

Upon successful update, the response contains the relevant open order object.